



the LEGEND collection


★★★★★

VAIBE
GOOD LIVING, BETTER VIBE


C-QR
solid power core

- authentic design
 - realistic matt surface thanks to Matecta® surface protection
 - 5 mm Solid Power Core core board, for high stability
- quick and easy installation thanks to the Drop Down Plus connection
 - includes 1 mm Cork underlay
 - 4-sided micro bevelled edge


legend wood

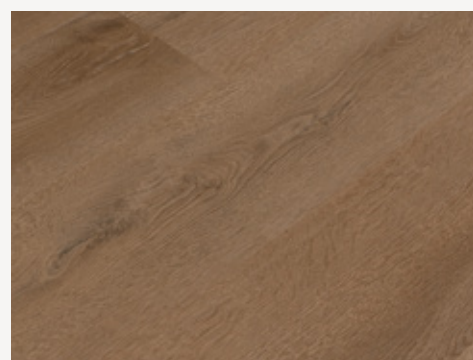


lausanne
0610011

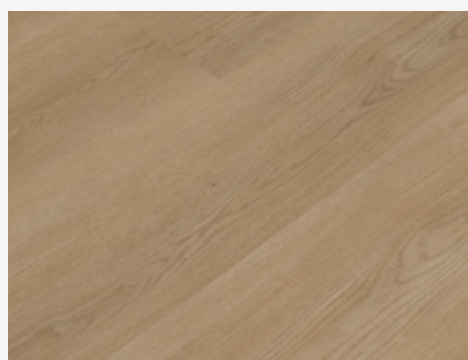


davos
0610012

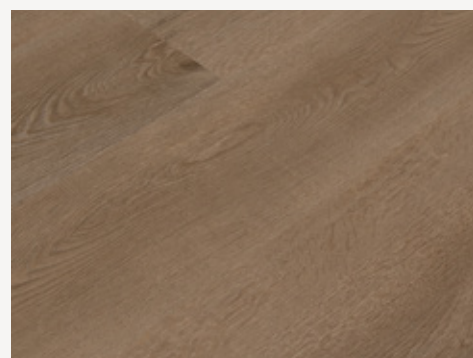


bern
0610013

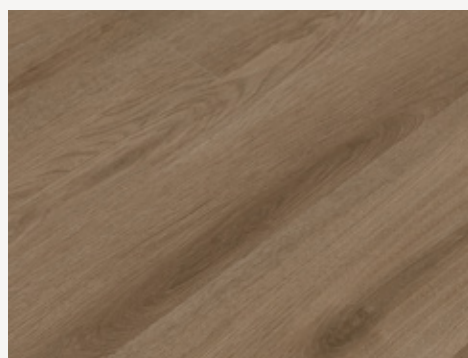

basel
0610014

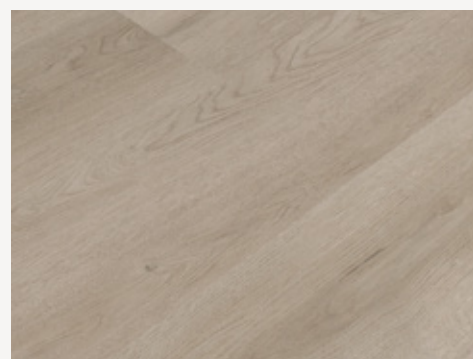

luzern
0610015

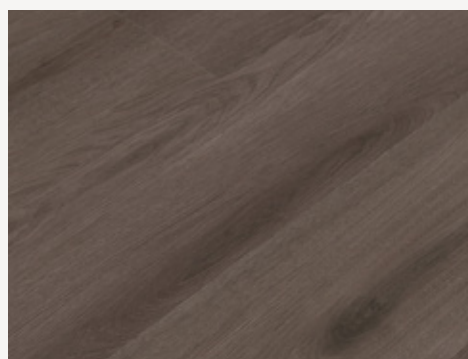

sion
0610016



davos
0610012

the LEGEND collection



description	norm	value
dimension plank	EN 428	1,520 mm x 225 mm
total thickness	EN 428	6.0 mm
wear layer thickness	EN ISO 24340	0.7 mm
packaging units		1 Pk. = 5 Planks = 1.71 m ² 1 Pal. = 48 Pk. = 82.08 m ²
type of covering	EN ISO 10582	Heterogen, PVC
surface finish		PUR
click locking strength	EN 433	5.74 N/mm
peel strength	EN 431	84N
density	EN 436	1762 kg/m ²
dimensional stability	EN 434	0,05%
squareness	EN 427	0.1 mm
height difference (assembled)	EN 13329	0.05 mm
opening between elements (assembled)	EN 13329	0.06 mm
residual impression	EN ISO 24343-1	0.02 mm
color fastness	EN ISO 105-B02	Stufe > 6
fire behavior	EN 13501-1	Bfl-S1
slip resistance	EN 13893	0,35 / DS
slip resistance	DIN 51130	R10
impact sound improvement	EN ISO 10140-3	17dB
thermal conductivity	EN 12667:2001	0.109 W/(m K)
thermal resistance	EN 12667:2001	0.031 m ² K/W
chemical resistance	EN ISO 26987	yes*
wear group	EN ISO 10582	typ 1
chair castor suitability	ISO 4918	yes, typ W, EN 12529
underfloor heating	EN 1264-2	suitable, max. 28°
emission test according AgBB scheme		very low emission

* Resistant, depending on concentration and exposure time, to typical household chemicals.

Subject to errors and technical changes 05/2025.



Trafficability excluded



VAIBE
GOOD LIVING, BETTER VIBE

Lodewijk de Raetlaan 39-1
8870 Izegem
Belgium

sales@vaibe.eu
+32 51 32 26 29
www.vaibe.eu